



TMdrive® -70e2 Product Application Guide

Medium Voltage 3-Level IEGT System Drive

metals

cranes

mining

testing

oil & gas


solar inverters

utilities

cement

The **TMdrive[®]-70e2** is a new version of the popular **TMdrive-70**. The drive offers **4kV class output**, and is suitable for induction or synchronous motors. The drive features:

- Smaller size
- Lower weight
- Additional safety features

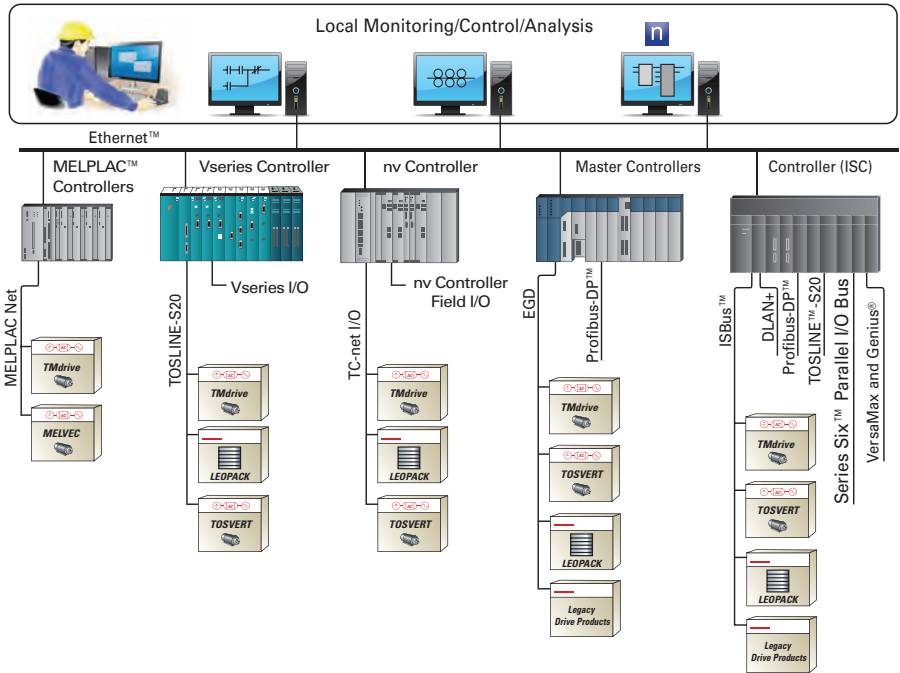


The new drive provides the same excellent benefits as the original:

- High reliability
- Regenerative converter
- Simple configuration and maintenance
- High energy efficiency and low cost of ownership


System Applications for the TMdrive-70e2 include:

- Main drives for hot strip steel mills
- Main drives for Cold Mills
- High power drives for compressors, fans, pumps, grinders and mine hoists



IEGT Technology Dramatically Lowers Cost of Ownership

The Injection Enhanced Gate Transistor (IEGT) is a breakthrough in power switch technology, providing lower cost of ownership.



Features

- **Low Voltage Gate Drive**
Given that the IEGT is a MOS structure, it can be gated (turned on/off) with ± 15 V.
- **Minimal Snubber Circuitry**
With the high dV/dt capability of the IEGT, there is only need for a small dc clamp snubber circuit.
- **High-Speed Switching**
The IEGT is switched at a rate of 500 Hz in this application.

Benefits

- **High Efficiency and Small Size**
A very compact phase leg assembly is achieved with:
 - A reduction in snubber circuitry
 - Integral forward diodes
 - Integral clamp diodes
- **Higher Performance**
The reduction in snubber circuitry allows a higher chopping frequency, lowering the torque ripple applied to the motor and harmonics fed back into the power system.
- **Motor and Power System Friendly**
The high-speed switching coupled with the three-level power bridge design delivers a smooth sine wave to the motor and power system.

Bringing Reliable Control To System Applications

High-power, precision-controlled processes are ideally suited for the TMdrive-70e2 with its efficient high current IEGT power devices and control cards common to the drive family. Flexible arrangement of converter, inverter and cooling units allows for maximum power density, resulting in minimum floor space, and installation cost.



Coordinated drive systems are an integral part of numerous manufacturing processes in the metals industry. TMdrive system drives address all of these applications with a robust control platform and a common Microsoft Windows-based tool. The tool supports local and remote connectivity, and is an invaluable asset for system and process analysis.



Due to its high reliability, simplicity of design and high efficiency, the TMdrive-70e2 is perfect for compressor, fan and pumping applications. It provides accurate speed control and high efficiency while eliminating the need for high maintenance mechanical flow control devices. The TMdrive-70e2 is also well suited for applications like grinding mills and mine hoists, where high overloads and impacts are a part of everyday operations.



A Look Inside the 9 MVA Drive

State-of-the-Art Technology:

- Injection Enhanced Gate Transistor (**IEGT**)-based **converter** and **inverter** provides power to the process at near unity power factor with minimum harmonic distortion
- **Water-cooling technology** for the power bridge reduces the footprint of the equipment saving valuable space in your factory
- **Modular design** for power bridge minimizes the time required for any maintenance activities



Control Functions

Each inverter and regenerative converter shares a common set of control boards. The primary control board performs several functions:


- Speed and torque regulation
- Sequencing
- I/O mapping
- Diagnostic data gathering

A mounting bracket is provided for an optional LAN interface board.



Interface Board

The interface board supports encoder or resolver, 24 V dc I/O and analog I/O. All I/O are terminated to a two-piece modular terminal block for ease of maintenance.



IEGT Three-Level Phase Leg Assembly



The drive has a total of six identical Injection Enhanced Gate Transistor (IEGT) phase leg assemblies in the converter and inverter.

The modular draw-out assembly includes:



- Four IEGT power semiconductors with integrated flyback diodes
- Neutral-point clamp diodes
- Water-cooled piping assembly with quick disconnect fittings
- IEGT gate driver circuit board
- Feedback control circuitry
- dc clamp snubber

Control Cabinet

Converter Front View

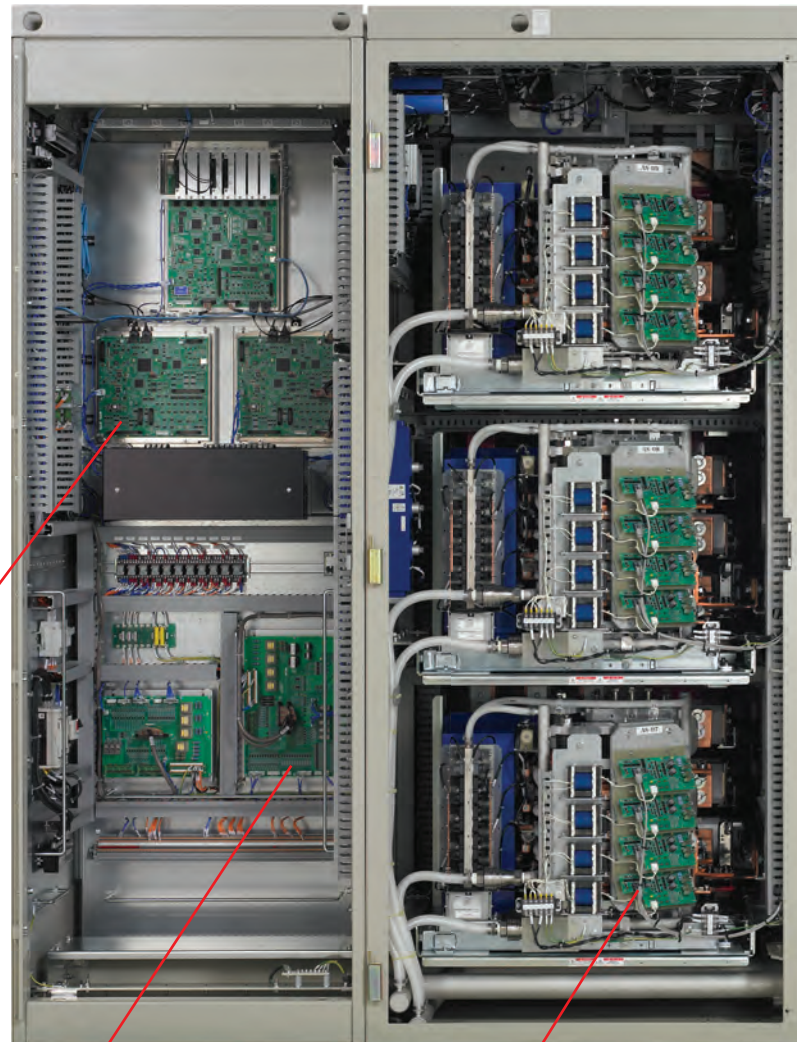

Inverter Front View

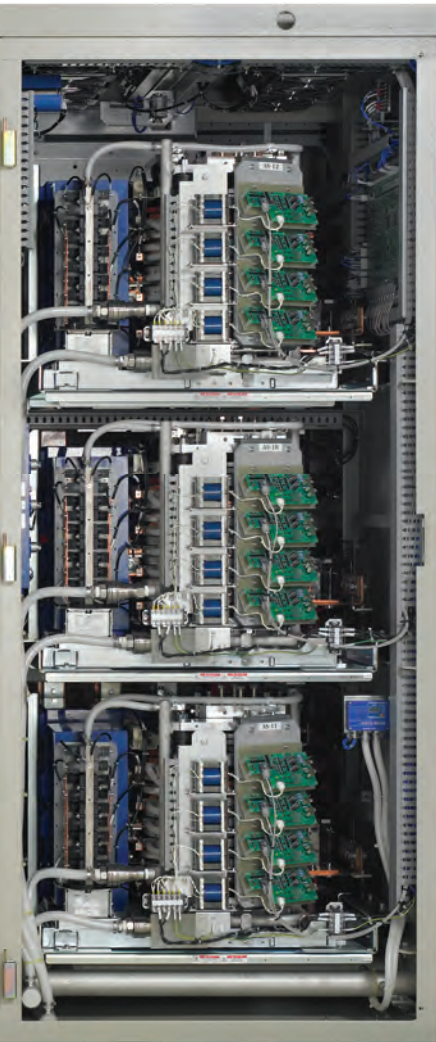


Output Voltage

Output Current



Optional Remote Control


Modular construction allows the power converter and control cabinets to be installed up to 150 m (500 ft) apart. This optimizes the use of space in your equipment room.




dc Bus

The converter generates dc power for the inverter. The inverter then creates variable frequency ac power to control the induction or synchronous motor. The dc power between the converter and inverter is conveyed on a solid copper bus behind the phase leg assemblies in both cabinets. For common bus systems this bus is extended to adjacent cases.

Inverter Back View

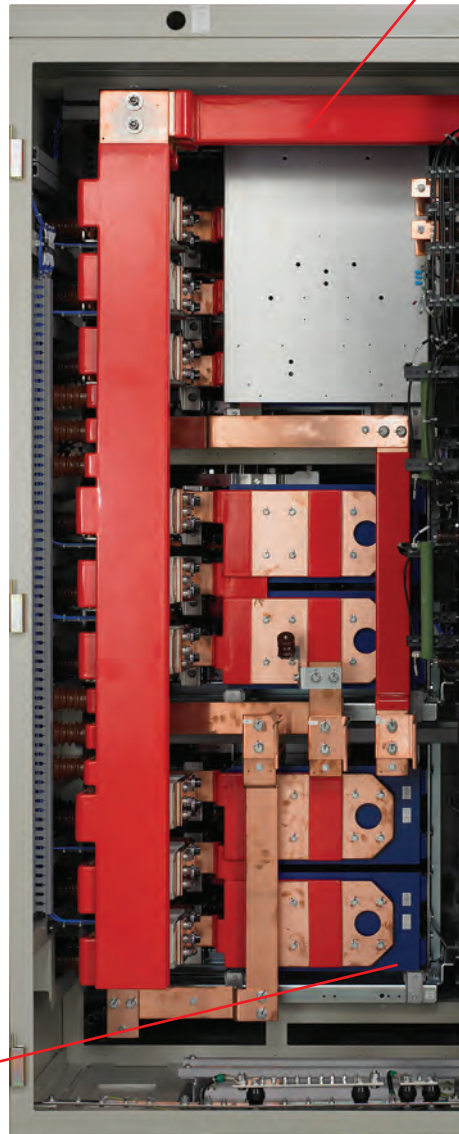

Converter Back View

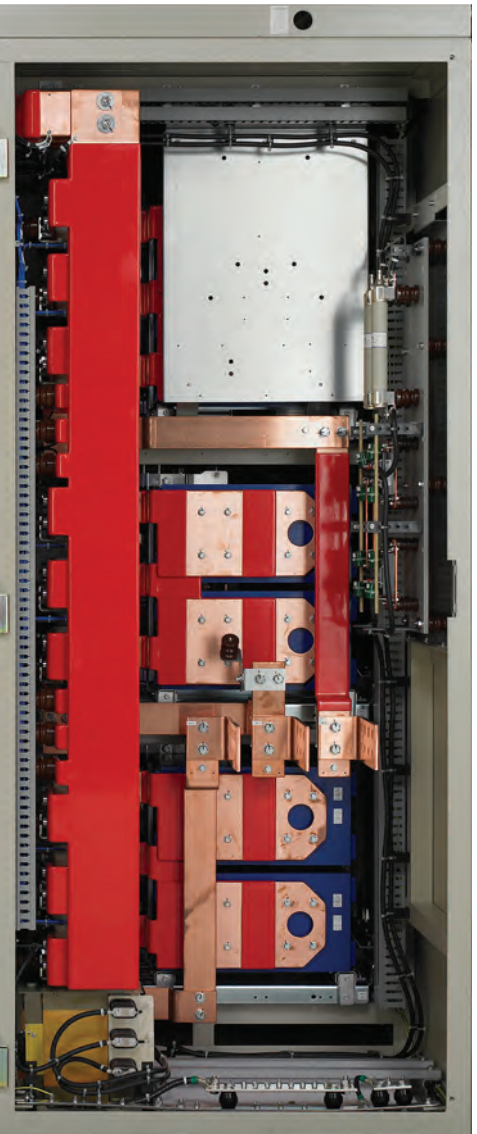

Main Capacitors

Film capacitors provide longer life, smaller size, and less weight.



Main Power

3-Phase motor and transformer connections are made in the rear. Both top and bottom are supported.



Cooling Water Interface


150 mm JIS-10K50A fittings are provided for connecting cooling water for de-ionized cooling loop.

Regenerative Systems



Three-Level Phase Leg Assembly for 9 MVA Converter and Inverter


Quick disconnect fittings for the cooling system reduces mean time to repair

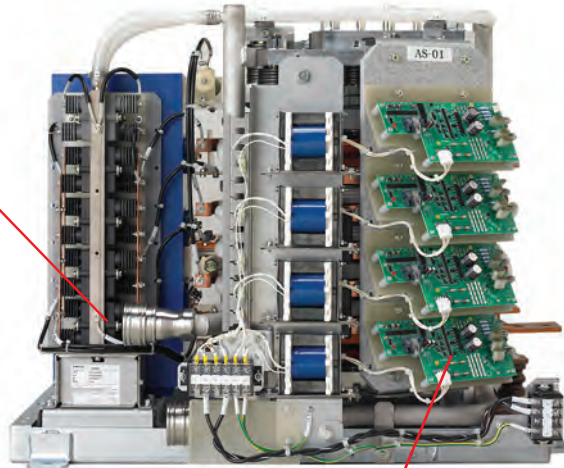

front view

dc clamp snubber circuit absorbs the energy generated in turning off the IEGTs

Compact gate driver assemblies due to low power switching requirements of the IEGT devices

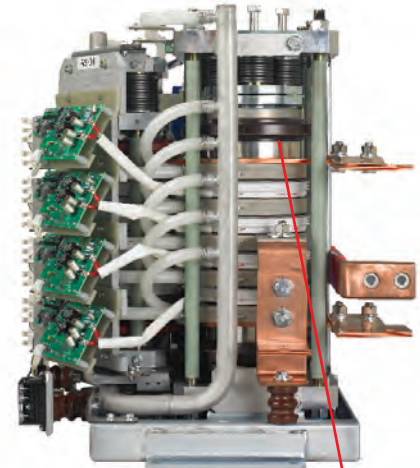

side view

IEGT devices with integral forward and clamp diodes allow a very compact phase leg stack, reducing the footprint versus previous technology.

(Note: the 6 MVA stack is completely different.)


Flexible Topologies To Match Your Needs



TMdrive-P70e2 Regenerative IEGT Converter

6000 Frame
9000 Frame


6000 Frame does not require P-C and N-C Snubbers

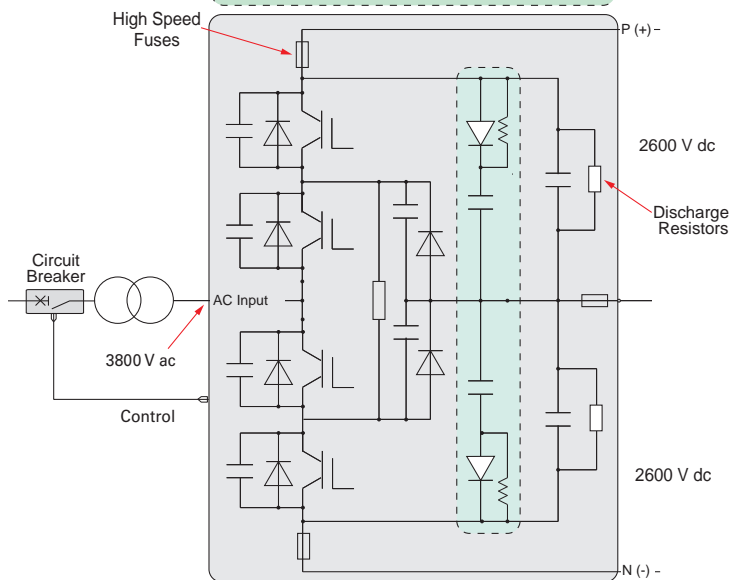

TMdrive-70e2 IEGT Inverter

6000 Frame
9000 Frame


6000 Frame does not require P-C and N-C Snubbers

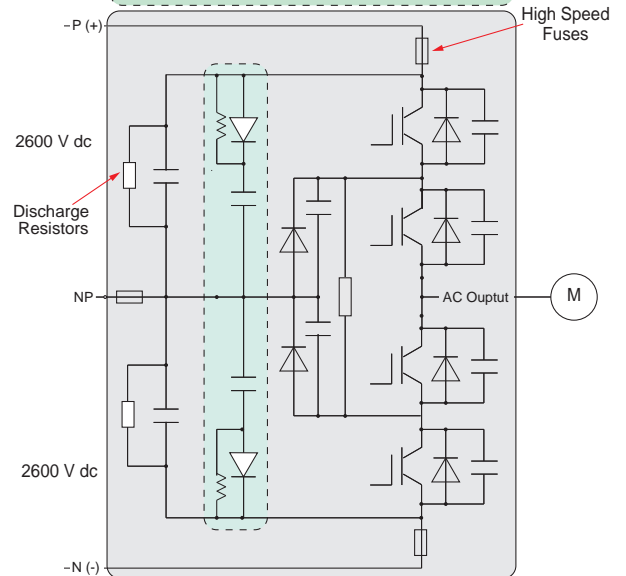


Flexible Topologies To Match Your Needs

Configuration Options


1 Bank Converter
1 Bank Inverter

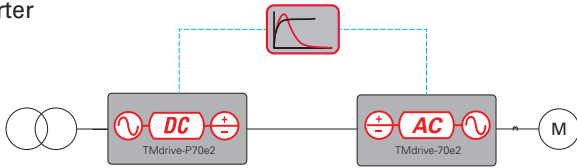


1 Bank Converter
2x1 Bank Inverters

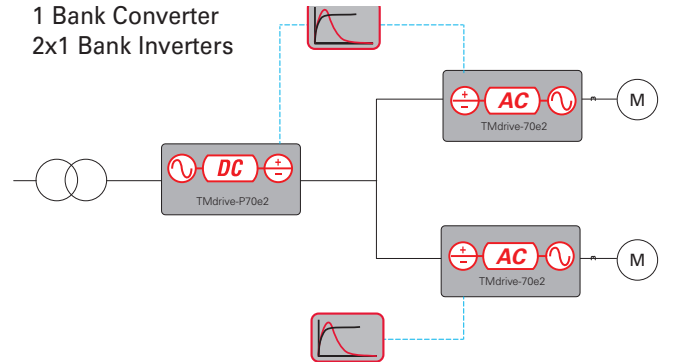


3 Bank Converter
3 Bank Inverter

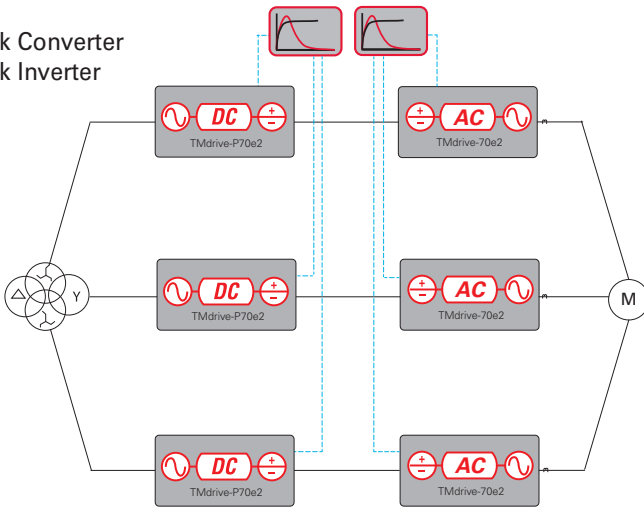


2 Bank Converter
2 Bank Inverter

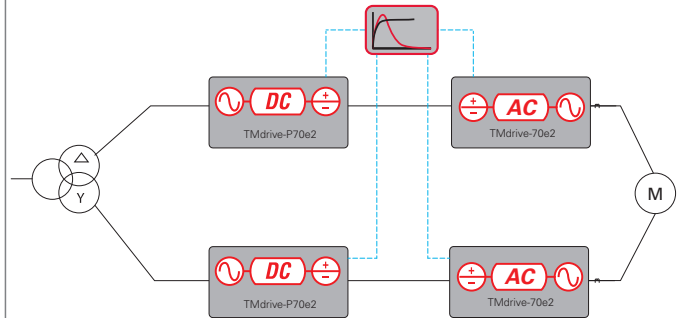








4 Bank Converter
4 Bank Inverter

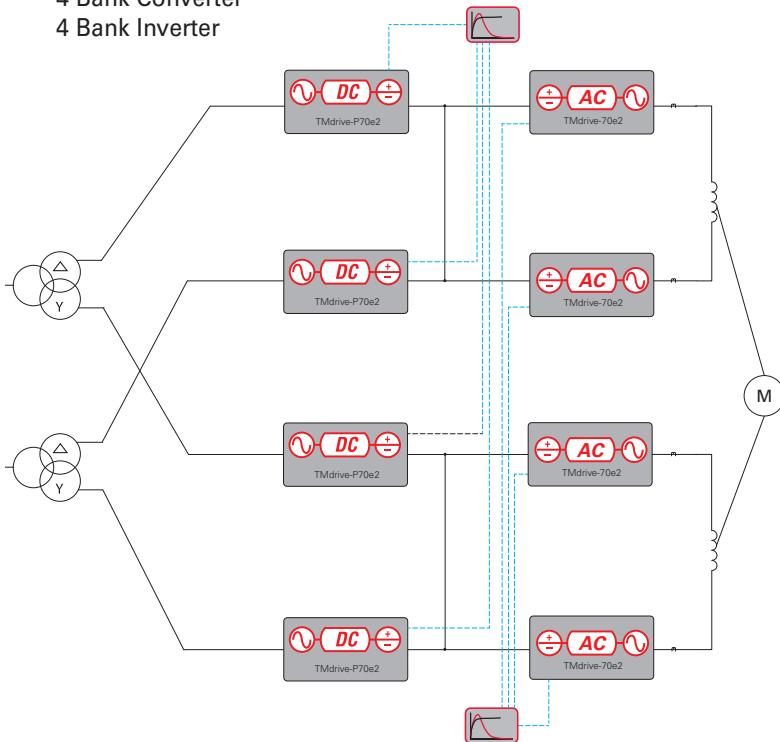

2 Bank Converter
3x1 Bank Inverters

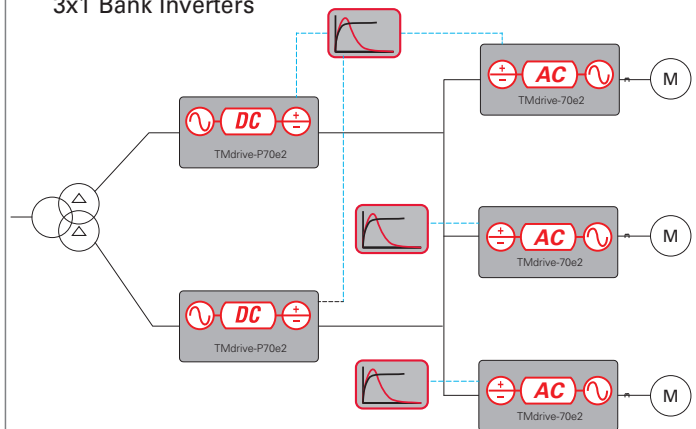

A Variety of Frames - 6 MVA
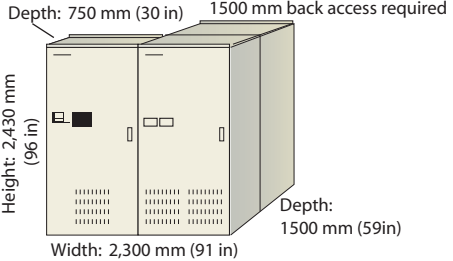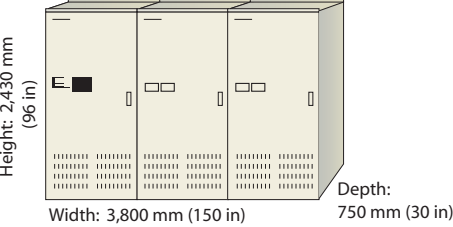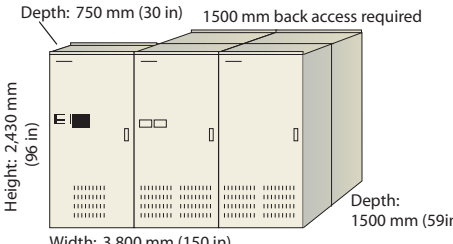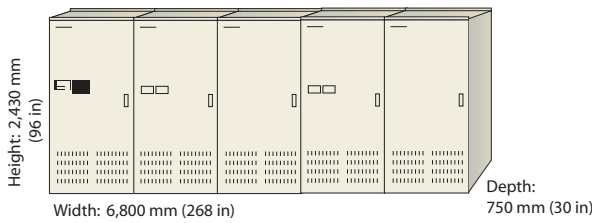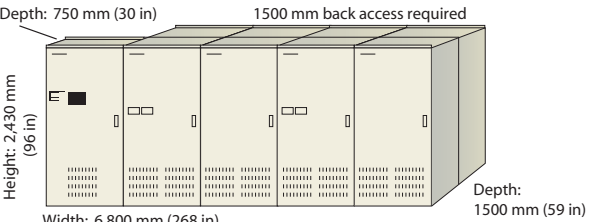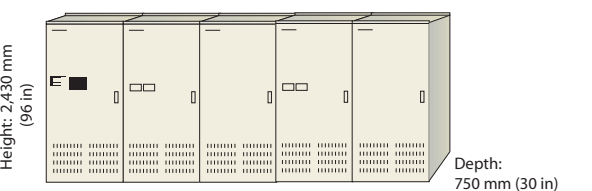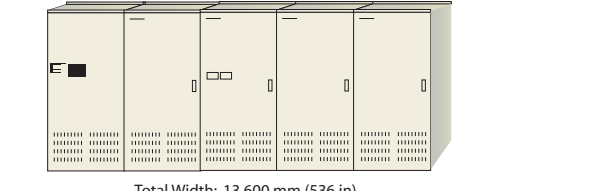
| | Banks | Frame (kVA) | Losses to Air (kW) | Losses to Water (kW) | Weight kg (lbs) | Control Power kVA | Motor Current A ac | Allowable Overload % |
|---|-------|-------------|--------------------|----------------------|-----------------|-------------------|--------------------|----------------------|
|  | 1 | 6,000 | 5 | 62 | 3,900 (8,850) | 3.0 | 950 | 150 |
| | | | | | | | 814 | 175 |
|  | | | | | | | 633 | 225 |
| | | | | | | | 570 | 250 |
|  | 2 | 12,000 | 10 | 124 | 7,800 (17,160) | 6.0 | 1900 | 150 |
| | | | | | | | 1628 | 175 |
|  | | | | | | | 1426 | 200 |
| | | | | | | | 1266 | 225 |
|  | 4 | 24,000 | 20 | 248 | 15,600 (34,320) | 12.0 | 3800 | 150 |
| | | | | | | | 3256 | 175 |
|  | | | | | | | 2852 | 200 |
| | | | | | | | 2532 | 225 |
|  | | | | | | | 2280 | 250 |


9 MVA

| | Banks | Frame (kVA) | Losses to Air (kW) | Losses to Water (kW) | Weight kg (lbs) | Control Power kVA | Motor Current A ac | Allowable Overload % |
|---|-------|-------------|--------------------|----------------------|-----------------|-------------------|--------------------|----------------------|
| <p>Depth: 750 mm (30 in)</p> <p>Height: 2,430 mm (96 in)</p> <p>Width: 2,800 mm (111 in)</p> <p>Depth: 1,500 mm (59 in)</p> <p>1500 mm back access required</p> | 1 | 9,000 | 10 | 95 | 4080 (8976) | 3.0 | 1430 | 150 |
| | | | | | | | 1226 | 175 |
| | | | | | | | 1073 | 200 |
| | | | | | | | 953 | 225 |
| | | | | | | | 858 | 250 |
| <p>Depth: 750 mm (30 in)</p> <p>Height: 2,430 mm (96 in)</p> <p>Width: 4,800 mm (189 in)</p> <p>Depth: 1,500 mm (59 in)</p> <p>1500 mm back access required</p> | 2 | 18,000 | 20 | 190 | 7,880 (17,336) | 6.0 | 2860 | 150 |
| | | | | | | | 2452 | 175 |
| | | | | | | | 2146 | 200 |
| | | | | | | | 1906 | 225 |
| | | | | | | | 1716 | 250 |
| <p>Depth: 750 mm (30 in)</p> <p>Height: 2,430 mm (96 in)</p> <p>Total Width: 7,600 mm (299 in)</p> <p>Depth: 1,500 mm (59 in)</p> <p>1500 mm back access required</p> | 3 | 27,000 | 30 | 285 | 11,960 (26,312) | 12.0 | 4290 | 150 |
| | | | | | | | 3678 | 175 |
| | | | | | | | 3219 | 200 |
| | | | | | | | 2859 | 225 |
| | | | | | | | 2574 | 250 |
| <p>Depth: 750 mm (30 in)</p> <p>Height: 2,430 mm (96 in)</p> <p>Total Width: 9,600 mm (378 in)</p> <p>Depth: 1,500 mm (59 in)</p> <p>1500 mm back access required</p> | 4 | 36,000 | 40 | 380 | 15,760 (34,672) | 12.0 | 5720 | 150 |
| | | | | | | | 4904 | 175 |
| | | | | | | | 4292 | 200 |
| | | | | | | | 3812 | 225 |
| | | | | | | | 3432 | 250 |


Notes:

1. Front and rear access doors: 1000 mm overhead clearance and 1500 mm front and rear access clearance recommended. Frame 6000 does not require rear access when configured in end to end arrangement.
2. Bottom cable entry is standard, top is optional.


Water Conditioning Equipment



Water conditioning control panel continuously monitors the status of the water system. Separate fault indications help find and fix problems fast.



Integrated water system has internal plumbing for de-ionized cooling loop.

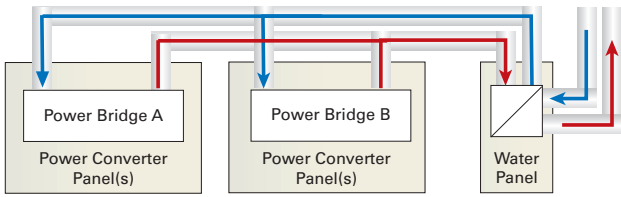

Separate type cooling has field-installed plumbing for de-ionized cooling loop.



Water to water heat exchanger keeps the de-ionized system isolated from the plant water supply.

Surge tank absorbs water during pump transients and indicates the internal cooling loop water level.

De-ionizer removes contaminants for the internal cooling loop.


Redundant pumps keep the system running even if one pump fails

| Type | Capacity | Width mm (in) | Depth mm (in) | Height mm (in) | Weight kg (lbs) | kVA | Notes (for 9 MVA drive) |
|------------------------|----------|---------------|---------------|----------------|-----------------|-----|--|
| Integrated with Lineup | 134 kW | 1200 (48) | 1440 (56) | 2375 (94) | 1600 (3527) | 5 | Capacity for one converter/inverter, (1 bank) Plant water required: 300 l/min (80 gal/min) |
| Separate Cabinet | 268 kW | 1200 (48) | 1590 (62) | 2375 (94) | 1700 (3638) | 10 | Capacity for two converters/inverters, (2 bank) Plant water required: 600 l/min (160 gal/min) |
| Separate Cabinet | 536 kW | 3000 (118) | 2000 (79) | 2500 (99) | 2500 (5500) | 15 | Plant water required: 1200 l/min (4 bank) (320 gal/min) |
| Separate Cabinet | 804 kW | 4300 (170) | 2000 (79) | 2500 (99) | 4300 (9480) | 25 | Plant water required: 1800 l/min (6 bank) (475 gal/min) |



Advanced PWM Technology

Advanced PWM control brings enhanced efficiency and reduced harmonics to TMDrive-70e2 systems. Fixed pulse pattern gate control uses optimum gating sequences to almost eliminate switching losses in the IEGT device. Gating sequences are pre-computed for the control rather than computed at runtime. The result is performance that reduces losses and harmonics.

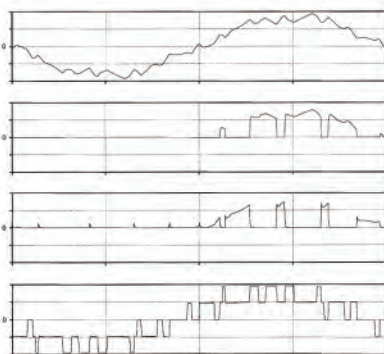


Conventional PWM

Input Current

Diode Current

IEGT Current

Output Voltage

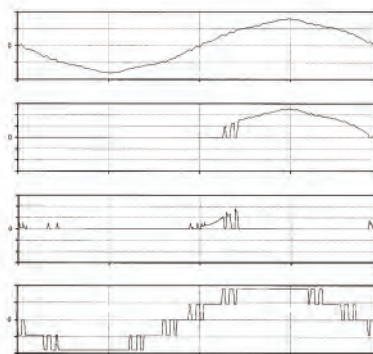


Fixed Pulse Pattern Control

Synchronous Motor Exciter

Synchronous Motor Field Exciter

- Microprocessor-based fully digital control
- One direction, full wave bridge thyristor rectification
- Current control following main speed/torque regulator commands
- Air cooled
- Maintenance from front
- Bottom cable entry
- Required free-standing indoor cubicle, totally enclosed IP20

Frame 1200 Field Supply

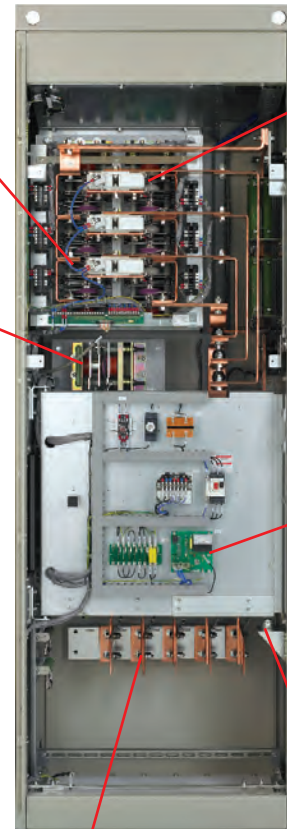

AC Leg Fuses protect power bridge from faults on the ac line



Autonomous Crowbar prevents dangerous motor voltages from developing under certain fault conditions

Main Power module. One module is applied for the 1200A supply and two modules for the 2100A model.

Ground Fault detection module provides indication of insulation failure

DC Field Connection Bus

AC Connection Bus. AC voltages up to 500 Vac can be connected depending on required voltage

| | Frame | Weight kg (lbs) | Input Voltage* | Current A dc | 60 second overload |
|--|-------|--------------------|--------------------------------------|-----------------|-----------------------|
|  2430 mm (96 in) 800 mm (32 in) Depth: 750 mm (30 in) | 1200A | 400 (880) | Max: 600Vrms ± 10% 50/60 ± 2Hz | 1180 | 150 |
| | | | | 1040 | 175 |
| | | | | 930 | 200 |
| | | | | 840 | 225 |
| | | | | 760 | 250 |
|  2430 mm (96 in) 1200 mm (47 in) Depth: 750 mm (30 in) | 2400A | 600 (1320) | Max: 750Vrms ± 10% 50/60 ± 2Hz | 2400 | 150 |
| | | | | 2260 | 175 |
| | | | | 2040 | 200 |
| | | | | 1850 | 225 |
| | | | | 1700 | 250 |

* Select depending on forcing voltage.



Enhanced Converter Technology


TMdrive-P70e2 VAR Control

The TMdrive-P70e2 converter can be configured in two modes, providing VAR Control within the limits of its current capacity.

One mode is the conventional PWM type normally set to hold unity power factor for all load conditions. (Shown in red)

Another mode is the Fixed Pulse Pattern type, providing voltage stability, improved harmonics and efficiency. The Fixed Pulse Pattern mode stabilizes line voltage by providing system VARs when line voltage is low and drawing VARs from the system when the voltage is high. By convention, VARs from the system are (+) and cause the line voltage to drop while VARs from the converter are (-) and cause the line voltage to rise. The relationship of line voltage, loads MW and converter MVAR is shown by the blue voltage lines depending on the measured line voltage.

MVA vs. MW and Voltage

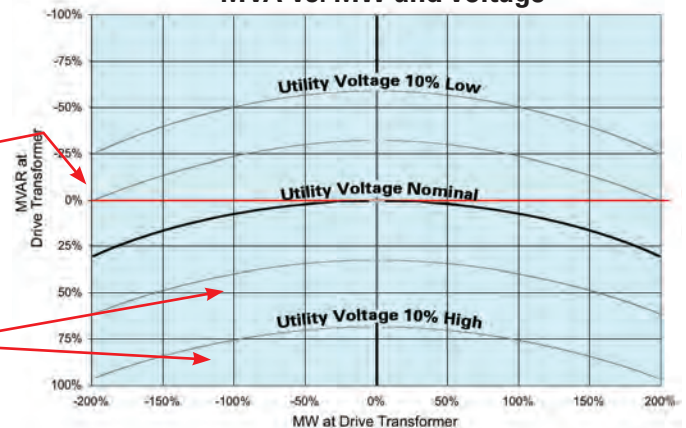

Application Examples

Applying the TMdrive-70e2 Starts With the Motor Design

Consideration must be given to motor design when applying the TMdrive-70e2. A primary constraint is the motor terminal voltage. It is important that the motor terminal voltage does not exceed 3650 Vac under any operating condition. Reserving voltage margin correctly is critical to success. Detailed motor design data is needed for correct application.

OL_V Overload derate. The rated motor voltage over the terminal voltage of the motor at maximum applied overload. Motors with no overload use 1.0.

RP_V Reduction in maximum voltage due to the dc bus ripple of the drive at low frequencies. If the base frequency is below 5 Hz then this derate is 0.97, otherwise it is 1.0.

ST_V Field forcing margin needed when applying synchronous motors. Apply 0.94 for synchronous motor systems.

SP_V Speed margin. For motors that run above base speed this is the ratio of the terminal voltage at base speed over the terminal voltage at top speed under maximum overload at each point. Other motors use 1.0.


$$\text{Maximum Rated Motor Voltage} = 3650 \times OL_V \times RP_V \times ST_V \times SP_V$$

Experience has shown that the following maximum rated motor voltages apply based on the type of motor and the application.

| Induction (Maximum Voltage at max OL and top speed) | Synchronous Maximum Rated Motor Volts | Rated Motor Frequency | Overload Requirement | Example Application |
|--|--|-----------------------|----------------------|---------------------|
| 3650 | 3500 | 60 Hz | 100% | Pump or Fan |
| 3500 | 3400 | 30 Hz | 200% | Mine Hoist |
| 3400 | 3300 | 5 Hz | 225% | Mill Stand |

TMdrive-70e2 Notes


- Allocate a minimum of 1000 mm (40 in) above cabinet for fan maintenance.
- Power rating data assumes ambient temperature of 5-40°C (41-104°F), altitude up to 1000 m (3280 ft) above sea level.
- The specified current ratings are continuous to which the indicated overload may be applied for a maximum of 60 seconds.
- Each cabinet requires 3-phase control power.
- For high performance torque regulation, a temperature sensor is mounted in the motor (induction motor only).
- All TMdrive-70e2 cabinets require 1500 mm (60 in) front access for connections and maintenance.
- Water connections for separate type cooling systems are located near the floor in the rear of power converter cabinets. The flange is 150 mm JIS-10K50A. Stainless piping is required for plumbing of the de-ionized loop. Secondary cooling water temperature supplied by customer 10-32° C (50-89° F).
- Speed and current regulator responses are computed per the adjacent figure in radians/s. Speed regulator responses shown are maximum available. Actual response will be limited by drive train mechanical conditions. Accuracy and linearity specifications shown are as measured under controlled conditions in our lab and while typical may not be achievable in all systems.
- dc Bus bar included in lineups is rated for one inverter only. For common bus systems, converters and inverters are arranged so that this limitation is not exceeded.
- When output or input reactors are used to parallel systems then the dc Buses of those systems must be connected together.
- Systems that share a common dc Bus must have the same winding configuration for their converter transformer secondaries.
- Field supply enclosures are typically installed directly behind control enclosures within the lineup.
- TMdrive-70e2 converters require a minimum of 15% total input impedance.
- Systems with a base frequency below 5 Hz may require additional 800 mm (32 in) capacitor panels for each dc link, 1800 kg weight.



Inverter Example

When specifying an inverter, start from the process requirements and work through the motor to the inverter. The following example illustrates this process.

1 Define process requirements.



$$kW_{\text{Shaft}} = 6500 \text{ kW (8700 hp)}$$

$$500 \text{ rpm}$$

The motor delivers constant torque from zero to base speed of 500 rpm and 7500 kW (10,000 hp).

Duty cycle requires 150% for 10 sec. but has rms duty cycle of 7500 kW (10,000 hp)

2 Select motor based on process requirements and compute required inverter kVA.

- 7500 kW (10,000 hp)
- 500 rpm, 3300 V
- Efficiency = 0.965
- Power factor = 1.00
- Service factor = 1.0
- Synchronous

$$I_{\text{ac Inverter}} = \frac{kW_{\text{Shaft}} \times 1000 \times SF_{\text{Mtr}}}{\sqrt{3} \times V_{\text{Motor rated voltage}} \times \text{Eff}_{\text{Mtr}} \times \text{PF}_{\text{Mtr}}}$$

$$= \frac{7500 \times 1000 \times 1.0}{\sqrt{3} \times 3300 \text{ V} \times 0.965 \times 1.0}$$

$$= 1360 \text{ amps}$$

3 Compute continuous current requirements for the inverter based on the selected motor.

4 Select inverter based on continuous current and overload requirements.

Scan the 150% entries in the inverter tables for a frame where the continuous current rating exceeds 1430 amps. The **9000 frame** meets this criterion (**1430 amps**) and is appropriate for this application.

| Current A ac | Allowable Overload % |
|--------------|----------------------|
| 1430 | 150 |
| 1226 | 175 |
| 1072 | 200 |
| 953 | 225 |
| 858 | 250 |

Regenerative Converter (TMdrive-70e2) Example

When specifying a converter, start from the process requirements and work through the motor to the inverter, and then the associated converter. The following example illustrates this process (continuation of inverter application example from above):

1 Compute kW requirements into the inverter. It is assumed that the converter is dedicated to the inverter specified in the application example above. It is also assumed that the converter is controlled to unity power factor.

$$kW_{\text{ac}} = \frac{kW_{\text{Shaft}}}{\text{Eff}_{\text{Mtr}}}$$

$$= \frac{7500 \text{ kW}}{0.965}$$

$$= 7762 \text{ kW}$$

2 Compute continuous ac current requirement of the converter based on its power requirements.

$$I_{\text{ac Converter}} = \frac{kW_{\text{ac}} \times 1000}{\sqrt{3} \times V_{\text{Converter line-to-line voltage}} \times \text{Eff}_{\text{drive}}}$$

$$= \frac{7762 \text{ kW} \times 1000}{\sqrt{3} \times 3800 \text{ V} \times 0.985}$$

$$= 1198 \text{ amps}$$

Note: For sizing systems with peak powers in regenerative mode, a different equation is used to compute power requirements.


$$kW_{\text{ac}} = kW_{\text{Shaft}} \times \text{Eff}_{\text{Mtr}}$$

3 Scan the regenerative converter table for entries that exceed your overload (150%), time (**60 sec**) and continuous current requirements (**1192 amps**). In this case the **9000 frame** TMdrive-P70e2 meets the requirement and is appropriate for this application.

| Current A ac | Overload - Time |
|--------------|-----------------|
| 1430 | 150% - 60s |
| 1226 | 175% - 60s |
| 1072 | 200% - 60s |
| 953 | 225% - 60s |
| 854 | 250% - 60s |

A Common Control to Reduce Cost of Ownership

Control Functions

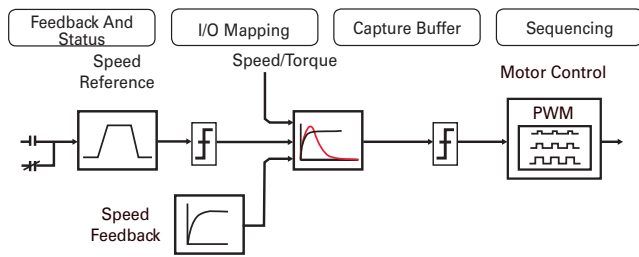

Instrumentation Interface

- Configuration**
- Direct Ethernet connection of TMdrive-Navigator to the drive
 - Drive Navigator connection to the drive using TC-net via the nv controller
- Meter Outputs**
- Motor current A and B, ± 10 V
 - Quantity 5 configurable, ± 10 V, 8-bit resolution

I/O Interface

- Digital Inputs**
- +24 V dc
 - Opto-coupled 20 mA
 - Quantity 6 configurable mapping
- 24-110 V dc
48-120 V ac
- Opto-coupled 10 mA
 - Quantity 1 configurable mapping
 - Quantity 1 dedicated mapping
- Digital Outputs**
- +50 V dc
 - Open collector 70e2 mA
 - Quantity 6 user defined
- Analog Inputs**
- 10 V, 4-20 mA
 - Quantity 2 ± 10 V or 4-20 mA
 - Differential 8Ω input impedance
 - 12-bit resolution
 - Optional Quantity 2 ± 10 V
 - 12 bit resolution *(Optional for Inverters only)*
- Analog Outputs**
- D/A 10 V
 - Quantity 4 ± 10 V, 10 mA max
 - User defined
 - 12-bit resolution
- Speed Feedback Resolver Input**
- Excitation frequency of 1 or 4 kHz
 - Source for resolvers is Tamagawa: www.tamagawa-seiki.co.jp
- (Induction Motor Only) Speed Feedback Encoder Input**
- A quad B with marker
 - Maximum frequency of 100 kHz
 - Differential 5 or 15 V dc
 - 5 or 15 V dc at 200 mA supply
- Speed Tach Follower Output**
- Maximum frequency of 10 kHz
 - External 15-24 V dc at 100 mA max
- Motor Temperature Feedback**
- High-resolution torque motor temperature feedback
 - 100 Ω positive temperature coefficient RTD or other sensor using optional signal conditioning module

Power Input/Output

| | |
|-------------------------------------|---|
| Input Voltage | 3800 V for Fixed Pulse Pattern type 3300 V for Carrier Comparison type |
| Input Voltage Variation | $\pm 5\%$ for fixed pulse pattern +5/-10% for conventional PWM, continuous operation below nominal requires derate |
| Input Frequency | 50/60 Hz |
| Input Chopping | 450/540 Hz |
| Input Harmonics Compliant | TMdrive-70e2 – IEEE 519 |
| Control Power | Control and Blowers 180-220 Vac, 50 Hz 3-Phase 198-242 Vac, 60 Hz 3-Phase Pumps and Precharge 380-460 Vac, 50/60 Hz 3-Phase |
| PLL Supply | 110/110 V 50 or 60 Hz 3 Phase, 5 VA |
| Displacement Power Factor | 0.98 TMdrive-P70e2 (see page 11) |
| Output Frequency | 0-75 Hz, 0-90 Hz with derate |
| Output Chopping Frequency | 512 Hz |
| Output Voltage for induction motors | 3,650 V ac |
| Efficiency | 99% at rated load |

Motor Control


- With Speed Sensor (Resolver or Encoder)**
- Speed regulator accuracy: $\pm 0.01\%$
 - Maximum speed response: 60 rad/sec (without coupling)
 - Torque linearity: $\pm 10\%$ Synchronous motors
 - Torque linearity: $\pm 3\%$ with temperature sensor } Induction Motor
 - $\pm 10\%$ without temperature sensor
 - Maximum Torque current response: 600 rad/sec
 - Torque range: 0-400% of rated motor torque
 - Maximum flux control range: 20% - 100%
- Without Speed Sensor (Induction Motor Only)**
- Speed regulator accuracy: $\pm 0.1\%$ with temperature sensor
 - $\pm 0.2\%$ without temperature sensor
 - (Using 1% slip motor at rated flux)
 - Maximum speed regulator response: 20 rad/sec
 - Minimum continuous speed: 3%
 - Torque linearity: $\pm 10\%$
 - Maximum Torque current response: 600 rad/sec
 - Torque range: 0-150% of rated motor torque
 - Maximum flux control range: 75% - 100%

Operator Interfaces




Mechanical (Inverters & Converters)

| | |
|-----------------------|---|
| Enclosure | IP 20 (NEMA 1); IP43 option |
| Cable Entrance | Bottom, top is optional |
| Wire Colors | Per CSA/UL and CI |
| Short Circuit Ratings | 100 kA for ac and dc buswork 25 kA for control power |
| Acoustic Noise | 66-68 dB @ 150% OL 1 m from cabinet in all directions 1.5 m in height above floor |




Environmental (Inverters & Converters)

| | |
|-----------------------------|--|
| Operating Air Temp. | 5° to 40° C (41 to 104° F) at rated load 5° to 50° C (41 to 122° F) with derating |
| Storage Temp. | -20° to 55° C (-13 to 131° F) |
| Humidity | 5 to 85% relative humidity Non-condensing |
| Altitude | 0 to 1000 m above sea level |
| Vibration | 10-50 Hz, <0.5 G |
| Operating Water Temperature | 10° C - 32° C at inlet 10° C - 35° C at inlet with derate Outlet temperature is inlet + 7.2° C |



Safety Integrity

Safety features according to IEC 61800-5-2 (Safety Integration Level 2) is insured by independent gate command lockout via two hardware inputs; UVS1 and UVS2.

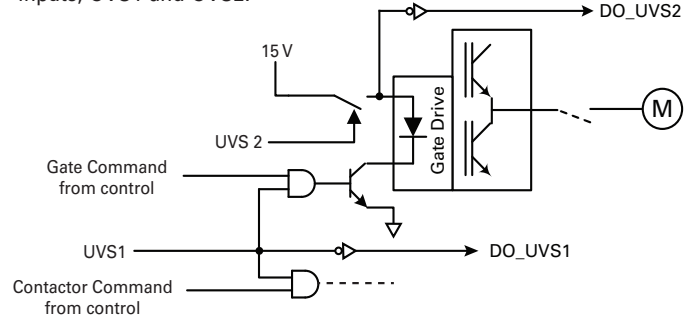

LAN Interface Options

| | |
|----------------------------|---|
| TC-net I/O | <ul style="list-style-type: none"> • 8 words in/out • 10 words in/19 out option |
| Ethernet Global Data (EGD) | • 10 words in/out |
| Profibus-DP | • 10 words in/out |
| Modbus RTU | • 10 words in/out |
| ControlNet | • 10 words in/out |
| DeviceNet | • 4 words in, 10 words out |

TOSLINE-S20 and ISBus legacy LANs can also be supported on request. Note: 1 word = 16 bits



Keypad (Inverters and Regenerative Converters)

High Function Display

- LCD backlight gives great visibility and long life
- Bar graphs, icons, menus, and digital values combine to provide concise status information, often eliminating the need for traditional analog meters

Easy-to-understand navigation buttons allow quick access to information without resorting to a PC-based tool



RJ-45 Ethernet port is used for the local toolbox connection

Keypad

Interlock button disables the drive

Switch to local mode and operate the equipment right from the keypad


Instrumentation Interface

- Two analog outputs are dedicated to motor current feedback
- Five analog outputs can be mapped to variables for external data logging and analysis



Emergency Stop Button and Circuit Breaker Operation Panel

TMEIC AC Drives Offer Complete Coverage

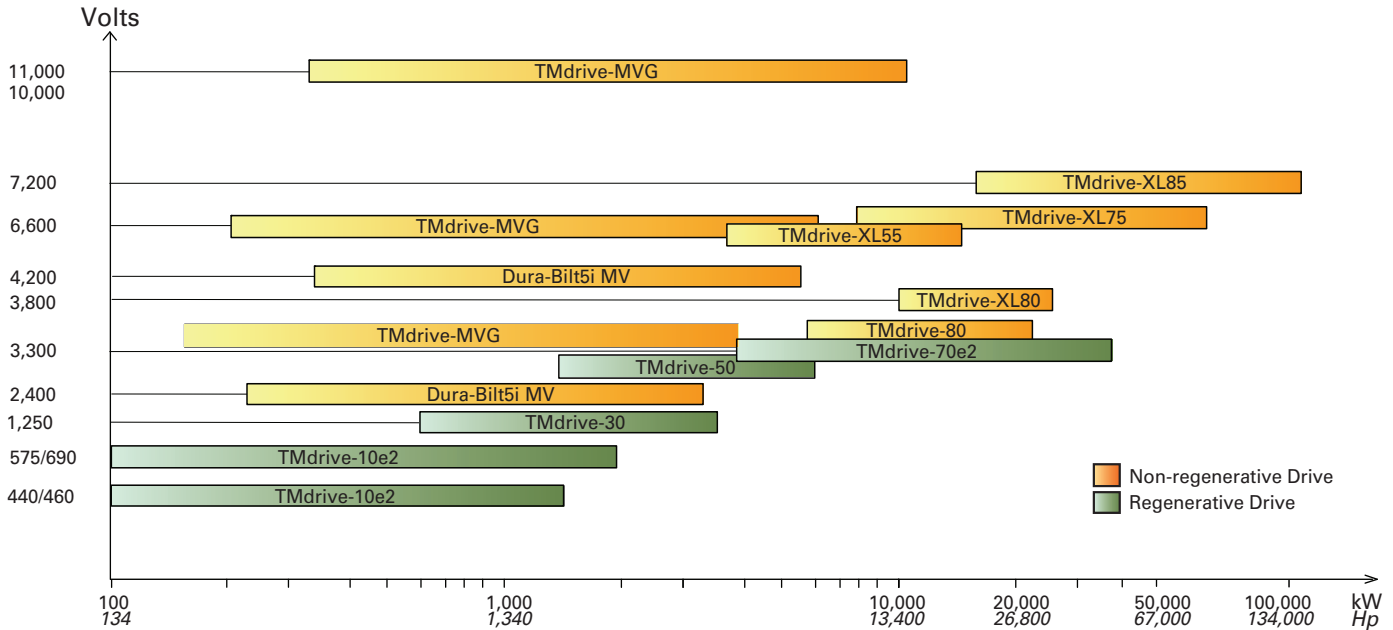

Global Office Locations:

TMEIC Corporation

Office: 1325 Electric Rd., #200, Roanoke, VA, USA 24018
 Mailing: 2060 Cook Drive, Salem, VA, USA 24153
 Tel.: +1-540-283-2000
 Fax: +1-540-283-2001
 Web: www.tmeic.com
 Email: info@tmeic.com

TOSHIBA MITSUBISHI-ELECTRIC INDUSTRIAL SYSTEMS CORPORATION

Mita 43 MT Bldg.
 13-16 Mita 3 chome, Minato-ku Tokyo
 108-0073 Japan
 Tel.: +81-3-5444-3828
 Fax: +81-3-5444-3820
 Web: www.tmeic.co.jp

TMEIC Europe Limited

6-9 The Square, Stockley Park
 Uxbridge, Middlesex, UK, UB11 1FW
 UK (London) Tel.: +44 870 950 7212
 Italy (Bari) Tel.: +39-080-504-6190
 Germany (Frankfurt) Tel.: +49-6968-194722
 Poland (Krakow) Tel.: +48-12432-3400
 Email: info@tmeic.eu
 Web: www.tmeic.com

TMEIC Industrial Systems India Private Limited

Unit # 03-04, Third Floor,
 Block 2, Cyber Pearl, HITEC City, Madhapur,
 Hyderabad, 500081, Andhra Pradesh, India
 Tel.: +91-40-4434-0000
 Fax: +91-40-4434-0034
 Web: www.tmeic.india
 Email: inquiry_india@tmeic.in

TOSHIBA MITSUBISHI-ELECTRIC INDUSTRIAL SYSTEMS (BEIJING) CORP.

21/F, Building B, In.do Mansion
 48 Zhichunlu A, Haidian District,
 Beijing 100098, PRC
 Tel.: +86 10 5873-2277
 Fax: +86 10 5873-2208
 Email: sales@tmeic-cn.com

TMdrive and MELPLAC are registered trademarks of TOSHIBA MITSUBISHI-ELECTRIC INDUSTRIAL SYSTEMS CORPORATION. TC-net and TOSLINE are trademarks of Toshiba Corporation. Ethernet is a trademark of Fuji Xerox Co., Ltd. in Japan. Profibus-DP is a trademark of Profibus International. Modbus is a trademark of Schneider Automation Inc. ControlNet is a trademark of ControlNet International, Ltd. DeviceNet is a trademark of Open DeviceNet Vendors Association, Inc. ISBus is a trademark of General Electric Company U.S.A. Microsoft and Windows are registered trademarks of Microsoft Corporation in USA and other countries.

All other products mentioned are registered trademarks and/or trademarks of their respective companies.

All specifications in this document are subject to change without notice. The above brochure is provided free of charge and without obligation to the reader or to TMEIC Corporation. TMEIC Corporation does not accept, nor imply, the acceptance of any liability with regard to the use of the information provided. TMEIC Corporation provides the information included herein as is and without warranty of any kind, express or implied, including but not limited to any implied statutory warranty of merchantability or fitness for particular purposes. The information is provided solely as a general reference to the potential benefits that may be attributable to the technology discussed. Individual results may vary. Independent analysis and testing of each application is required to determine the results and benefits to be achieved from the technology discussed.

If you have any questions regarding your project requirements, please contact TMEIC Corporation at 540-283-2000.